


Digital Door Viewer


User Guide

Model: HT-D111A

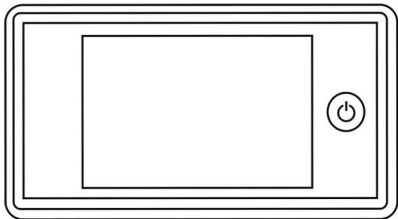

Attention




1. Please read this user guide carefully before use.
2. **DO NOT** disassemble the camera or the main body.
3. Handle with care.
4. Please unscrew two screws from the bottom of the Digital Door Viewer, take out the Holding Plate and take off the paster cover on it and prepare to install.



Battery

Dispose the used batteries appropriately. **DO NOT** bury or burn the batteries and keep them away from children. **DO NOT** swallow. **DO NOT** recharge or disassemble the batteries.

Package Content

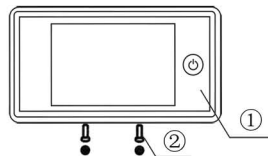




- ① Digital Door Viewer ④ Holding Plate
② Locking Screws x 2pcs ⑤ Camera & Locking Barrel
③ AAA Batteries x 4pcs (optional)

Before Installation

Prior to mounting the Peephole Viewer, please make sure the batteries have been installed correctly.

Installation

1. Replace the existing door viewer or drill a 14mm hole in the door at eye level and insert the camera from outside. Make sure the arrow mark in the front of the camera points upwards.
2. Fit the holding plate over the end of the LENS then screw the locking barrel on to the threaded part of the camera and tighten, this will hold the plate to the door. Make sure that the arrow on the plate points upwards.
3. Carefully connect the FPC connector to the socket located on the back of the Digital Door Viewer;
4. Hook the Digital Door Viewer over the bracket at the top of the locking plate and secure with two small screws through the holes at the bottom of the Digital Door Viewer case.



Operation

Lightly press and release the Power Button, the door viewer will working continuously for 10 seconds.

Specification:

1. Door Thichness: 40~75mm; 75~110mm
2. Barrel Diameter: 14~22mm
3. LCD Screen: 3.5" TFT
4. Power Source: 4 AAA Batteries
5. Size: 126*79*16.8mm
6. Weight: 220g